



Technical details

Temperature range
-10°C ... +50°C

Filtered, oil-free and dried compressed air according to ISO 8573-1:2010, Class 7:2:4, instrument air, free of aggressive additives. Alternatively the pressure dew point must be at least 10°C below lowest occurring ambient temperature.

Materials

Body: Al (anodized), plastic, seals: NBR

Protection

IP 65 according to EN 60529




Manifold system with integrated electrical connection including LED indicators. Each station can accommodate two 3/2-way valves or one 5/2- or 5/3-way valve. All connections are accessible from the front.

The valves and the multi-pin plug with cable must be ordered separately.

The valve terminal is delivered pre-assembled and function-tested. If not specified with the order, valve configuration is as follows: Valves are mounted according to their order number, starting with high numbers at the side of the multi-pin, ending with low numbers on the opposite side, followed by blind plates (if ordered).

Order code

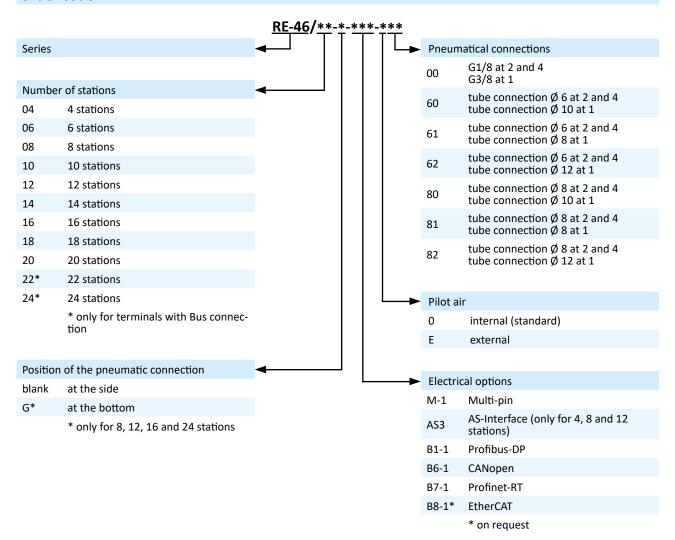

More detailed information about the installation you find in the manual at www.airtec.de.


Subject to change 01

Series RE-46




Dimensions

Multi-pin, Bus connection

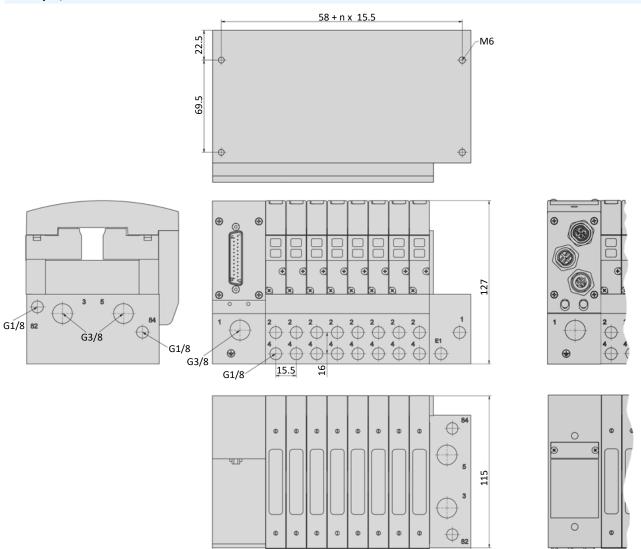

Version RE-46-G

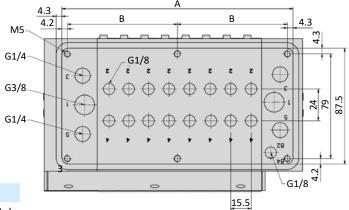

Model-No.:	Α	В
RE-46/08-G	174,5	83 (1x)
RE-46/12-G	236,5	76 (2x)
RE-46/16-G	298,5	72,5 (3x)
RE-46/24-G	422,5	82,8 (4x)

1 = pressure inlet 2,4 = outlets

3,5 = exhausts

82,84 = solenoid exhausts n = number of stations






Electrical options


Multi-pin, 2 up to 12 stations

The 25-pin multi plug (see page 7-19) has to be ordered separately.

Pin	Function	Wire color
1	GND	white
2	solenoid 1	brown
3	solenoid 3	green
4	solenoid 6	yellow
5	solenoid 7	grey
6	solenoid 9	pink
7	solenoid 11	blue
8	solenoid 13	red
9	solenoid 15	black
10	solenoid 17	violet
11	solenoid 19	grey/ pink
12	solenoid 21	red/ blue
13	solenoid 23	white/ green

Pin	Function	Wire color
14	solenoid 2	brown/ green
15	solenoid 4	white/ yellow
16	solenoid 6	yellow/ brown
17	solenoid 8	white/ grey
18	solenoid 10	grey/ brown
19	solenoid 12	white/ pink
20	solenoid 14	pink/ brown
21	solenoid 16	white/ blue
22	solenoid 18	brown/ blue
23	solenoid 20	white/ red
24	solenoid 22	brown/ red
25	solenoid 24	white/ black







Multi-pin, 14 up to 20 stations

The 44-pin multi plug (see page 7-19) has to be ordered separately.

Pin	Function	Wire color
1	GND	white
2	solenoid 3	brown
3	solenoid 5	green
4	solenoid 9	yellow
5	solenoid 12	grey
6	solenoid 15	pink
7	solenoid 18	blue
8	solenoid 21	red
9	solenoid 24	black
10	solenoid 27	violet
11	solenoid 30	grey/ pink
12	solenoid 33	red/ blue
13	solenoid 36	white/ green
14	solenoid 39	brown/ green
15	-	white/ yellow
16	GND	yellow/ brown
17	solenoid 2	white/ grey
18	solenoid 5	grey/ brown
19	solenoid 8	white/ pink
20	solenoid 11	pink/ brown
21	solenoid 14	white/ blue
22	solenoid 17	brown/ blue

Pin	Function	Wire color
23	solenoid 20	white/ red
24	solenoid 23	brown/ red
25	solenoid 26	white/ black
26	solenoid 29	brown/ black
27	solenoid 32	grey/ green
28	solenoid 35	yellow/ grey
29	solenoid 38	pink/ green
30	-	yellow/ pink
31	solenoid 1	green/ blue
32	solenoid 4	yellow/ blue
33	solenoid 7	green/ red
34	solenoid 10	yellow/ red
35	solenoid 13	green/ black
36	solenoid 16	yellow/ black
37	solenoid 19	grey/ blue
38	solenoid 22	pink/ blue
39	solenoid 25	grey/ red
40	solenoid 28	pink/ red
41	solenoid 31	grey/ black
42	solenoid 34	pink/ black
43	solenoid 37	blue/ black
44	solenoid 40	red/ black





AS-Interface

 Bus connector
 AS-Interface connector

 Power connector
 AS-Interface connector

 Bus-Voltage
 18.5 ... 31.6 ∨ DC

 Power-Voltage
 24 ∨ DC ± 10%

 Address selection
 Low voltage switch plug Ø 1.3 mm, slave selection by DIP-switch



t to change 03

Series RE-46



Electrical options

Profibus-DP

Bus In: plug M12 5-pin B-code

Bus Out: socket M12 5-pin B-code

Power connector plug M12 5-pin A-code

Baud rate 9.6 Kbit/s ... 12 Mbit/s, automatic adjustment

Voltage 24 V DC ± 10%

Power consumption 2.9 W

Address selection by 2 decimal coded rotary switches.

Bus terminal resistance external over Bus Out socket



CANopen

Bus In: plug M12 5-pin A-code

Bus Out: socket M12, 5-pin, A-code

Power connector plug M12 5-pin A-code

Baud rate 10 Kbit/s ... 1 Mbit/s

Voltage 24 V DC ± 10%

Power consumption 2.9 W

Address selection by 2 decimal coded rotary switches.

Bus terminal resistance external over Bus Out socket



Profinet-RT

Bus In: socket M12, 4-pin, D-code

Bus Out: socket M12, 4-pin, D-code

Power connector plug M12 5-pin A-code
Baud rate 100 Mbit/s, full duplex

Voltage 24 V DC ± 10%

Power consumption 3.6 W

Address selection by controler-remote



EtherCAT

Bus In: socket M12, 4-pin, D-code
Bus Out: socket M12, 4-pin, D-code

Power connector plug M12 5-pin A-code

Baud rate plug M12 5-pin A-code

100 Mbit/s, full duplex

Voltage 24 V DC ± 10%

Power consumption 3.5 W



04 Subject to change





Technical details

Outlets according to the pneumatically connections of the terminal

Temperature range -10°C ... +50°C

Medium

Filtered, oil-free and dried compressed air according to ISO 8573-1:2010, Class 7:2:4, instrument air, free of aggressive additives. Alternatively the pressure dew point must be at least 10°C below lowest occurring ambient temperature.

Materials Body: Al (anodized), plastic, seals: NBR,

inner parts: Al, stainless steel and brass

Nominal voltage 24 V DC, ± 10%


Power consumption 1.3 W

Protection IP 65 according to EN 60529




Electrically operated spool valve. The manual override is non-detent. The manual override is located on top of the valve cover.

2/2-way-valve




KF-46-210/2-HN-S12 2 x 2/2-way, single solenoid, air spring return, NC


2 x 3/2-way-valves



KF-46-310/2-HN-S12 2 x 3/2-way, single solenoid, air spring return, NC



KF-46-312/2-HN-S12 2 x 3/2-way, single solenoid, air spring return, NO



KF-46-314/2-HN-S12 2 x 3/2-way, single solenoid, air spring return, 1 x NC, 1 x NO

5/2-way-valves



KF-46-510-HN-S12

5/2-way, single solenoid, air spring


return



KF-46-511-HN-S12


5/2-way, single solenoid, mechanical

spring return




KF-46-520-HN-S12 5/2-way, double solenoid


5/3-way-valves



KF-46-530-HN-S12 5/3-way, center position closed



KF-46-533-HN-S12 5/3-way, center position exhausted



KF-46-534-HN-S12 5/3-way, center position pressurized

Technical data

Model-no.:	KF-46-210/2-HN-S12	KF-46-310/2-HN-S12	KF-46-312/2-HN-S12	KF-46-314/2-HN-S12
Operating pressure (bar)	2.58	2.58	2.58	2.58
Pilot pressure (bar) *	2.58	2.58	2.58	2.58
Nominal size (mm)	4.5	4.5	4.5	4.5
Flow rate (NI/min)	430	430	630	430 / 630 (NC / NO)
Response time (ms) at 6 bar	on: 15 off: 28	on: 15 off: 28	on: 15 off: 28	on: 15 off: 28
Weight (kg)	0.188	0.188	0.188	0.188

^{*} Valves are not suitable for external pilot supply.

Subject to change 05

Series RE-46



Technical data

Model-no.:	KF-46-510-HN-S12	KF-46-511-HN-S12	KF-46-520-HN-S12
Internal pilot pressure			
Operating pressure (bar)	2.58	2.58	2.58
Pilot pressure (bar)	2.58	2.58	2.58
External pilot pressure			
Operating pressure (bar)	- *	010	010
Pilot pressure (bar)	_ *	38	38
Nominal size (mm)	6	6	6
Flow rate (NI/min)	950	810	950
Response time (ms) at 6 bar	on: 15 off: 31	on: 14 off: 33	on: 20 off: 20
Weight (kg)	0.158	0.158	0.188

^{*} Valves are not suitable for external pilot supply.

Model-no.:	KF-46-530-HN-S12	KF-46-533-HN-S12	KF-46-534-HN-S12
	KI -40-330-IIIV-312	KI -40-555-11N-512	KI -40-334-11N-312
Internal pilot pressure			
Operating pressure (bar)	38	38	38
Pilot pressure (bar)	38	38	38
External pilot pressure			
Operating pressure (bar)	010	010	010
Pilot pressure (bar)	38	38	38
Nominal size (mm)	6	6	6
Flow rate (NI/min)	680	680	680
Response time (ms) at 6 bar	on: 20 off: 30	on: 20 off: 30	on: 20 off: 30
Weight (kg)	0.188	0.188	0.188


Accessories

Model-no.:	RE-19-DT	
	Pressure dividing plug	
Model-no.:	RE-46-RSV	
	Check valve	
Model-no.:	RE-46-B-01	
	Mounting bracket (pair)	
Model-no.:	RE-x6-V-EP	
in a	 x = 1 Blind plate, set x = 4 Blind plate for valve and coil 	


station




Model-no.:



28-ST-146-M1-yy-xxx



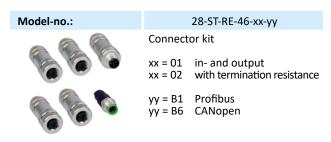

O6 Subject to change